


Axe de guidage sur support SAS

types d'axes pouvant être utilisés

- Ø_ : version standard (Cf53), trempé rectifié h6
- Ø_ Chr : version chromé (Cf53), trempé rectifié h7
- Ø_ Inox: version inox (X90CrMoV18), trempé rectifié h6

Support SAS en aluminium

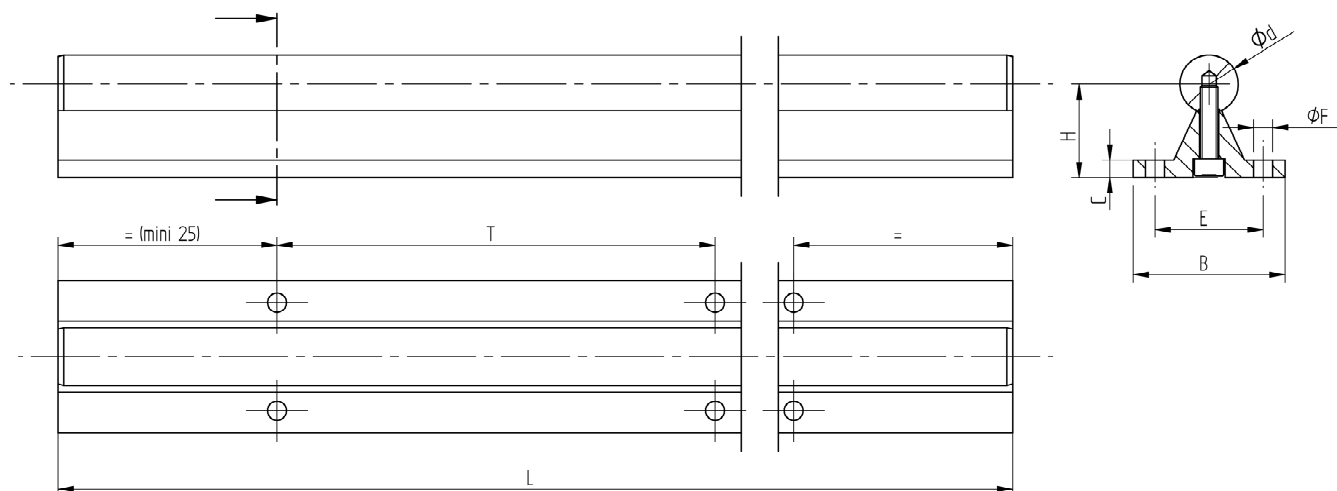

Référence	Dimensions (mm)							
	Ød	H	T	E	ØF	B	C	poids (Kg/m)
Ø12 + SAS 12 - T75	12	22	75	29	4.5	40	5	1,70
Ø12 + SAS 12 - T100			100					
Ø12 + SAS 12 - T120			120					
Ø16 + SAS 16 - T100	16	26	100	33	5.5	45	5	2,50
Ø16 + SAS 16 - T150			150					
Ø20 + SAS 20 - T100	20	32	100	37	6.5	52	6	3,85
Ø20 + SAS 20 - T150			150					
Ø25 + SAS 25 - T120	25	36	120	42	8.5	57	6	5,40
Ø25 + SAS 25 - T150			150					
Ø25 + SAS 25 - T200			200					
Ø30 + SAS 30 - T150	30	42	150	51	11	69	7	7,60
Ø30 + SAS 30 - T200			200					
Ø40 + SAS 40 - T200	40	50	200	55	11	73	8	12,60
Ø50 + SAS 50 - T200	50	60	200	63	11	84	9	18,90
Ø60 + SAS 60 - T200	50	68	200	72	11	94	10	26,60